

## G3550 3U EnergySaving server chassis


### FEATURES

- 01) build in Intelligent EnergySaving function
- 02) efficiently fan life time extendable
- 03) build in two adjustable 80mmx25mm fan assembly
- 04) HDD drive bay with vibration reduced function
- 05) high grade aluminum rackmounting handles
- 06) support 12"x13" eATX or smaller MB
- 07) main construction sheet metal by 1.2mm~2.0mm
- 08) high & clean grade Korean SECC (not cheap SGCC)
- 09) most Taiwan RPS durable fixed at inside & outside
- 10) normal PS2 & most Taiwan RPS makers approved
- 11) IPC China branded model global 3 years warranty



### SPECIFICATION

- \* Storage capacity: 6 x 5.25" ODD and 2 x 3.5" HDD and 2 x 2.5" HDD bay
- \* Intelligent EnergySaving device's default is all fans automatically activated if system temperature up to 38 degree-C
- \* Intelligent EnergySaving device's default is 38 degree-C but individual fan can be adjusted between 30~60 degree-C
- \* Intelligent EnergySaving device supported with four fan fail's indication and warning (stop warning by any button)
- \* Intelligent EnergySaving device supported with Celsius or Fahrenheit Degree (convertible by C/F button)
- \* HDD drive bay with vibration reduced function
- \* Build in high grade aluminum rackmounting handles
- \* Build with high & clean grade Korean SECC sheet metal by 1.2mm~2.0mm thickness
- \* Equipped two USB 2.0 ports
- \* Build in two adjustable 80mmx25mm fan assembly (fan part# D80SM-12C)
- \* Support standard eATX(12"x13") & eATX(12"x10.5") & ATX(12"x9.6") & MicroATX(9.6"x9.6") & Mini-ITX(6.7"x6.7") MB
- \* Support PS2 power supply with 120mm~140mm fan version (max. psu depth: 200mm)
- \* Or support PS2 Mini Redundant power supply by Zippy & SureStar & Enhance (max. psu depth: 200mm)
- \* Support 4 slot full high expansion cards (max. 330mm long)
- \* If eATX 12"x13" MB & 2.5" HDD bracket installed, the bottom side of 5.25" bay allows maximum 190mm deep device
- \* If all 6 x 5.25" bay installed with more than 190mm deep 5.25" devices, do not install eATX MB & 2.5" HDD bracket
- \* Standard paint: black
- \* IPC China branded server chassis model (with build-in fans) global 3 years warranty
- \* Chassis dimension: 19" x 3U x 550mm (21.65" deep)
- \* Accessory pack: M3 truss head screw x 32pcs, #6 round head screw x 22pcs, #6 round head screw x 22pcs, MB stand-off x 7pcs
- \* Package: NW 8.87 KGM, GW 10.65 KGM, 2.96 CUFT (carton size: 680x560x220mm)
- \* Green Energy saving server patent pending areas: China, Taiwan, Thailand, Korea, Japan, USA, UK, EU, Russia
- \* Patent and Law attorney agency: China GuanDong Kwo Hui Attorney at Law

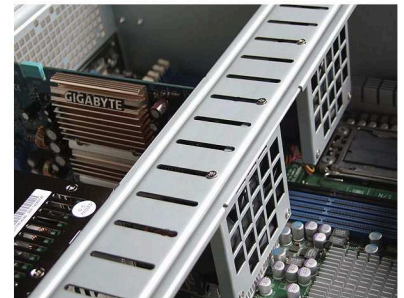

### ORDERING INFORMATION

- Chassis model # & description: G3550 3U EnergySaving server chassis
- Optional part# & description 1-0: Support PS2 psu with 120mm~140mm fan version (max. psu depth: 200mm)
- Optional part# & description 1-1: support & approved by Enhance ENR0500 (400W/500W/600W) 185mm deep RPS
- Optional part# & description 1-2: support & approved by SureStar R4B series (400W/500W/600W/700W/800W) 199mm deep RPS
- Optional part# & description 1-3: support & approved by Enermax EMA series (460W/550W) 199mm deep RPS
- Optional part# & description 1-4: support & approved by Etasis EFRP-2462 (460W) & S2502 (500W) 190mm deep RPS
- Optional part# & description 1-5: support & approved by Zippy MRT/MRW/MRG 185mm~200mm deep 300W~800W RPS
- Optional part# & description 2-0: (NJ-600) 600mm 2-layer 3-travel universal slide rail (part# is 1 pair)
- Optional part# & description 2-1: (1234U-RMK) 1234U rear mounting kit (part# is 1 pair)
- Optional part# & description 3-0: (SUNON6025) Sunon 60mmx25mm 2ball fan (part# is 1pcs, can install 2pcs at rear)
- Optional part# & description 4-0: (25-35-BK) 5.25" space to one 3.5" HDD or one 3.5" HDD space to two 2.5" HDD bracket
- Optional part# & description 5-0: (2525TO3HDBK) two 5.25" drive space converted into three 3.5" HDD bracket
- Optional part# & description 5-1: (3525TO5HDBK) three 5.25" drive space converted into five 3.5" HDD bracket
- Optional part# & description 5-2: (SS-46TM) 1x5.25" to 4x2.5" SAS/SATA Hot-Swap Cage
- Optional part# & description 5-3: (SS-86TM) 2x5.25" to 8x2.5" SAS/SATA Hot-Swap Cage
- Optional part# & description 5-4: (SS-126TM) 3x5.25" to 12x2.5" SAS/SATA Hot-Swap Cage
- Optional part# & description 5-5: (S-36TM) 2x5.25" to 3x3.5" SAS/SATA Hot-Swap Cage
- Optional part# & description 5-6: (S-46TM) 3x5.25" to 4x3.5" SAS/SATA Hot-Swap Cage
- Optional part# & description 5-7: (S-56TM) 3x5.25" to 5x3.5" SAS/SATA Hot-Swap Cage
- Optional part# & description 5-8: (S-36TL) 2x5.25" to 3x3.5" TrayLess SAS/SATA Hot-Swap Cage
- Optional part# & description 5-9: (S-46TL) 3x5.25" to 4x3.5" TrayLess SAS/SATA Hot-Swap Cage
- Optional part# & description 5-10: (S-56TL) 3x5.25" to 5x3.5" TrayLess SAS/SATA Hot-Swap Cage
- Optional part# & description 5-11: (S-16TL) 1x5.25" to 1x3.5" TrayLess SAS/SATA Hot-Swap Cage



Latest updated on October 01, 2014