

R4480 4U ATX rackmount server chassis




SPECIFICATION

- * Drive Space: 3 x 5.25" ODD & 9 x 3.5" HDD horizontally installable (one of 3.5" as FDD allowed)
- * The main sheet metal constructed by 1.2mm~2.0mm SGCC mechanism
- * High strength aluminum alloy die casting handles ensure stability during rackmounting
- * Equipped with aluminum alloy butterfly keylock & advanced door with acrylic window
- * Equipped with two USB 2.0 ports and LAN/HDD/Power LED at front bezel (two USB 3.0 as option)
- * Front 12cm dust filter with captive hand screws without opening the front door
- * One 120mm x 25mm cooling fan behind the dust filter (fan part# D12SM-12)
- * Equipped with vibration reduction for all HDD and ODD, extend storage appliance life
- * Forward & backward adjustable hold-down card holder with 6 upward & downward adjustable clamps
- * MB: CEB (12"x10.5"), ATX(12"x9.6"), MicroATX(9.6"x9.6"), Mini-ITX(6.7"x6.7")
- * 7-slot full height expansion cards up to max. 230mm deep (if HDD installed)
- * 7-slot full height expansion cards up to max. 282mm deep (if no HDD installed)
- * Build-in two ABS screwless 80mmx25mm fan brackets at rear panel (fans are option)
- * 8cm or 12cm fan version standard PS2 PSU compatible (depth at 140mm~220mm)
- * Support SureStar R4S series 400W~500W PS2 Mini Redundant PS (depth 174mm)
- * Support Zippy MRT & MRW series 300W~600W PS2 Mini Redundant PS (depth 185mm)
- * Support SureStar R4B series 600W~800W PS2 Mini Redundant PS (depth 199mm)
- * Support Zippy MRG series 500W~800W PS2 Mini Redundant PS (depth 200mm)
- * Standard paint: scratch-resistant Black textured or scratch-resistant Beige RAL 9018
- * IPC China branded server chassis (with build-in fan) global 3 years warranty
- * Chassis dimension: 19" x 4U x 480mm (18.89" deep)
- * Accessory: MB stand x1, #6 x52, M3 x16, key x2, hold-down card clamp x6, ear & handle x1 pair
- * Package: NW 12.00 KG, GW 13.50 KG, 3.03 CUFT (carton size at 60x55x26cm)
- * Patent and Law attorney agency: China GuanDong Kwo Hui Attorney at Law



ORDERING INFORMATION

- Model#: R4480 4U ATX rackmount server chassis
- Option A-1: PS2 PSU 8cm or 12cm~14cm fan version standard PS2 PSU compatible (depth at 140mm~220mm)
 - Option A-2: PS2 RPS SureStar R4S series 400W/500W PS2 Mini Redundant PS (depth at 174mm)
 - Option A-3: PS2 RPS Zippy MRT & MRW series 300W~600W PS2 Mini Redundant power supply (depth at 185mm)
 - Option A-4: PS2 RPS SureStar R4B series 600W/700W/800W PS2 Mini Redundant PS (depth at 199mm)
 - Option A-5: PS2 RPS Zippy MRG series 500W~800W PS2 Mini Redundant power supply (depth at 200mm)
 - Option B-1: NJ-600 600mm 2-layer 3-travel universal rail (cabinet internal depth 600~1200mm compliant)
 - Option B-2: 1234U-RMK 1234U rear mounting kit
 - Option C: D80SM-12 YateLoon 80mmx25mm exhaust fan at small 3pinx500mm (part# is 1pcs, can install 2pcs at rear)
 - Option D-1: N-12SS 1x3.5" FDD to 1x2.5" HotSwap Cage SATA/SAS 12G
 - Option D-2: N-13SS 1x3.5" FDD to 1x2.5" TrayLess HotSwap Cage SATA/SAS 12G
 - Option D-3: N-20SS 1x3.5" FDD to 2x2.5" TrayLess HotSwap Cage SATA/SAS 12G
 - Option D-4: SS-21TL 1x3.5" FDD to 2x2.5" TrayLess HotSwap Cage SATA/SAS 6G
 - Option E-1: 25-35-BK 1x5.25" to 1x3.5" bracket or 1x3.5" HDD space to 2x2.5" SSD/HDD bracket
 - Option E-2: 2525TO3HDBK 2x5.25" to 3x3.5" bracket
 - Option E-3: 3525TO5HDBK 3x5.25" to 5x3.5" bracket
 - Option E-4: N-16TM 1x5.25" to 1x3.5" HotSwap Cage SATA/SAS 12G
 - Option E-5: S-16TM 1x5.25" to 1x3.5" HotSwap Cage SATA/SAS 6G
 - Option E-6: N-16TL 1x5.25" to 1x3.5" TrayLess HotSwap Cage SATA/SAS 12G
 - Option E-7: S-16TL 1x5.25" to 1x3.5" TrayLess HotSwap Cage SATA/SAS 6G
 - Option E-8: N-29SS15 1x5.25" to 2x2.5" HotSwap Cage SATA/SAS 12G
 - Option E-9: N-67SS 1x5.25" to 6x2.5" HotSwap Cage SATA/SAS 12G
 - Option E-10: SS-88TM 1x5.25" to 8x2.5" HotSwap Cage SATA/SAS 6G
 - Option E-11: N-49SS-MS 1x5.25" to 4x2.5" HotSwap Cage SFF-8643 12G
 - Option E-12: N-49SS 1x5.25" to 4x2.5" HotSwap Cage SATA/SAS 12G
 - Option E-13: SS-46TM 1x5.25" to 4x2.5" HotSwap Cage SATA/SAS 6G
 - Option E-14: SS-86TM 2x5.25" to 8x2.5" HotSwap Cage SATA/SAS 6G
 - Option E-15: N-36TM 2x5.25" to 3x3.5" HotSwap Cage SATA/SAS 12G
 - Option E-16: S-36TM 2x5.25" to 3x3.5" HotSwap Cage SATA/SAS 6G
 - Option E-17: N-36TL 2x5.25" to 3x3.5" TrayLess HotSwap Cage SATA/SAS 12G
 - Option E-18: S-36TL 2x5.25" to 3x3.5" TrayLess HotSwap Cage SATA/SAS 6G
 - Option E-19: SS-126TM 3x5.25" to 12x2.5" HotSwap Cage SATA/SAS 6G
 - Option E-20: N-46TM-MS 3x5.25" to 4x3.5" HotSwap Cage SFF-8643 12G
 - Option E-21: N-46TM 3x5.25" to 4x3.5" HotSwap Cage SATA/SAS 12G
 - Option E-22: S-46TM 3x5.25" to 4x3.5" HotSwap Cage SATA/SAS 6G
 - Option E-23: N-46TL-MS 3x5.25" to 4x3.5" TrayLess HotSwap Cage SFF-8643 12G
 - Option E-24: N-46TL 3x5.25" to 4x3.5" TrayLess HotSwap Cage SATA/SAS 12G
 - Option E-25: S-46TL 3x5.25" to 4x3.5" TrayLess HotSwap Cage SATA/SAS 6G
 - Option E-26: N-56TM 3x5.25" to 5x3.5" HotSwap Cage SATA/SAS 12G
 - Option E-27: S-56TM 3x5.25" to 5x3.5" HotSwap Cage SATA/SAS 6G
 - Option E-28: N-56TL 3x5.25" to 5x3.5" TrayLess HotSwap Cage SATA/SAS 12G
 - Option E-29: S-56TL 3x5.25" to 5x3.5" TrayLess HotSwap Cage SATA/SAS 6G
 - Option F-1: 1MSAS-4SATA-500MM SFF-8087 Mini-SAS (Host) to Four SATA (Device) cable
 - Option F-2: SFF-8643-500MM SFF-8643 Mini-SAS HD (Host) to SFF-8643 Mini-SAS HD (Device) cable
 - Option F-3: 4SATA-SFF-8643-500MM Four SATA (Host) to SFF-8643 Mini-SAS HD (Device) cable

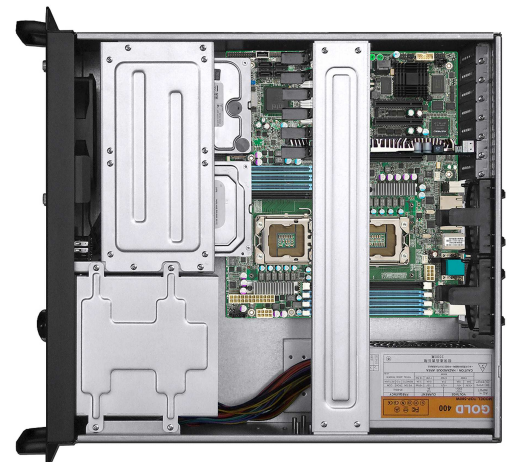

- Option F-4: SFF-8643-4SATA-500MM SFF-8643 Mini-SAS HD (Host) to Four SATA (Device) cable
- Option G-1: 2U2011A-8080 2U Intel LGA2011 LGA2066 active CPU cooler Square
- Option G-2: 2U2011A-5694 2U Intel LGA2011 active CPU cooler Narrow
- Option G-3: 2U1150A 2U Intel LGA115x Xeon 1230 active CPU cooler
- Option G-4: 2U4094A 2U AMD EPYC SP3 LGA4094 active CPU cooler
- Option G-5: 2U3647A-S82 2U Intel LGA3647 active CPU cooler Square
- Option G-6: 2U3647A-R82-1 2U Intel LGA3647 active CPU cooler Narrow

Latest updated on May 09, 2020